

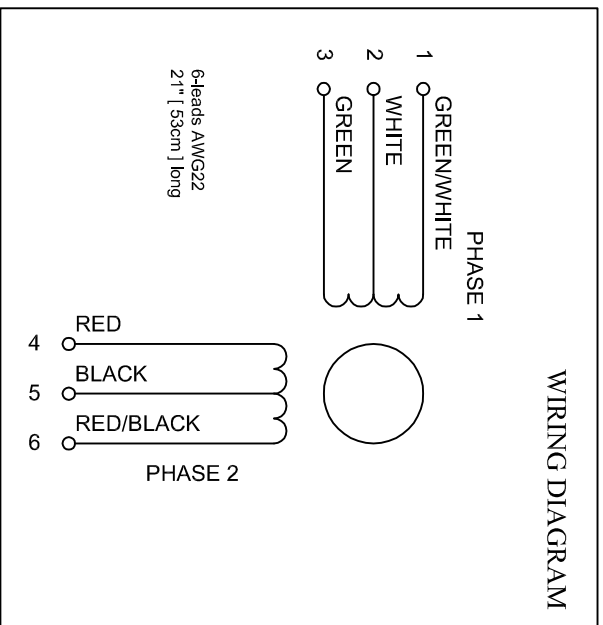


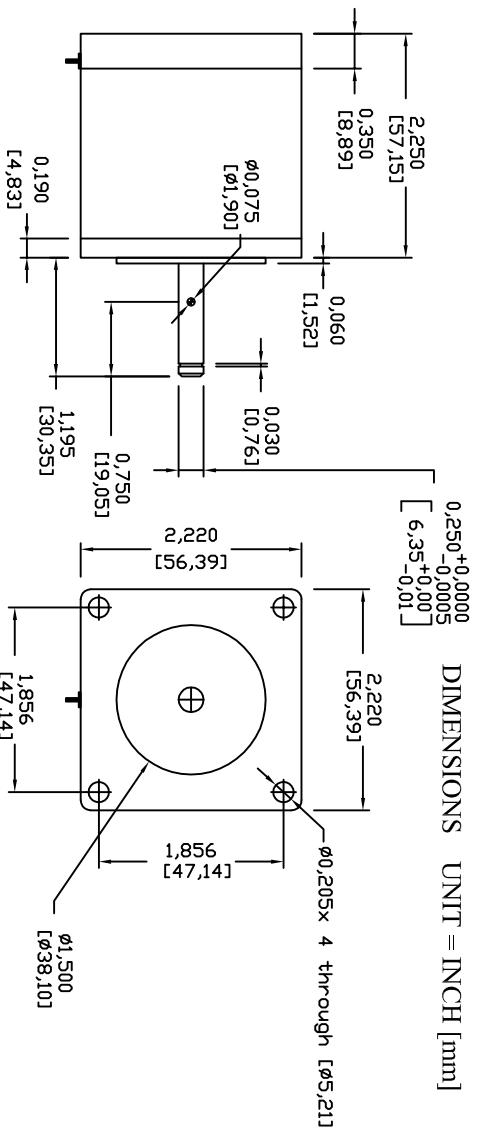

SPECIFICATIONS		(b)-bipolar connection
Step Angle	deg	1.8
Voltage	V DC	6.0 (u), 8.5 (b)
Current / phase	A / phase	1.2 (u), 0.85 (b)
Resistance / phase	ohm / phase	5.0 (u), 10 (b)
Inductance / phase	mH / phase	8.0 (u), 23 (b)
Holding Torque	N-cm	83 (u), 117 (b)
Detent Torque	N-cm	59 (u), 83 (b)
Rotor Inertia	g-cm ²	144
Weight	lbs	1.20
	kg	0.54

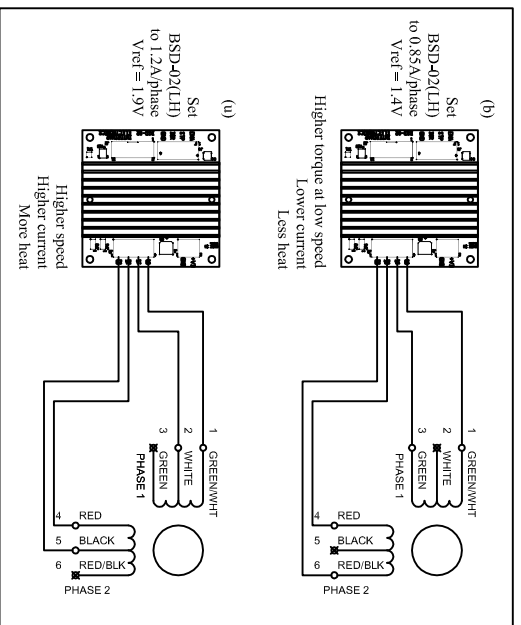

RECOMMENDED DRIVER:
 BSD-02 or BSD-02LH from Interinar Electronics
 - Vref Adjusted to 1.4V (0.85A/phase) for (b) or 1.9V (1.2A/phase) for (u)
 - Available step modes: Full-, Half-, Quarter- and Eighth- (or for LH Sixteenth-) Step
RECOMMENDED POWER SUPPLY:
 24Vdc, min 1.7A for (b) or 24Vdc, min 2.4A for (u)

We have used our best effort in preparing this document. We make no representations or warranties with respect to the accuracy or completeness of the contents of this document and specifically disclaim any implied warranties of fitness for a particular purpose. We shall not be liable for any loss of profit or any other commercial damages.

REV	REV NOTE	DATE

		TITLE 2-PHASE STEP MOTOR 5023-094-001 NEMA 23 -57mm	
http://www.interinar.com support@interinar.com	DWG# P1211.08 M.W. SCALE CAT 47 not to scale	SHEET 1 OF 1	DATE 12-11-2008