
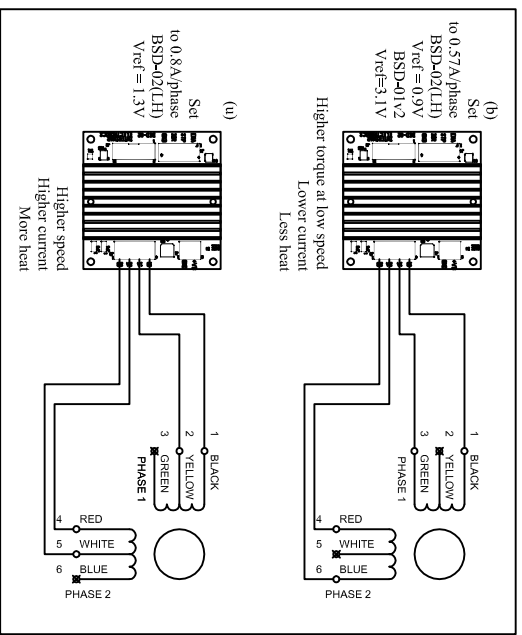
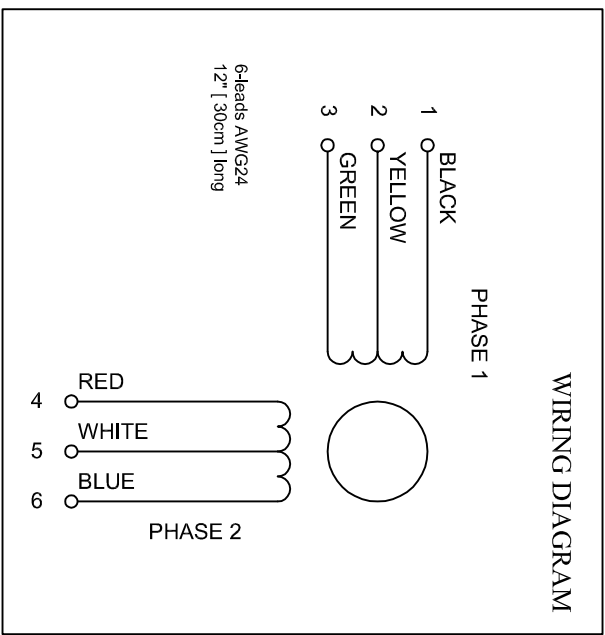


SPECIFICATIONS		(b)-unipolar connection
Step Angle	deg	1.8
Voltage	V DC	6.0 (u), 8.6(b)
Current / phase	A / phase	0.8 (u), 0.57 (b)
Resistance / phase	ohm / phase	7.5 (u), 15 (b)
Inductance / phase	mH / phase	6.7 (u), 26.8 (b)
Holding Torque	oz-in	36 (u), 46 (b)
	N-cm	26 (u), 33 (b)
Detent Torque	oz-in	N/A
	N-cm	N/A
Rotor Inertia	oz-in <sup>2</sup>	0.3
	g-cm <sup>2</sup>	5.4
Weight	lbs	0.6
	kg	0.3

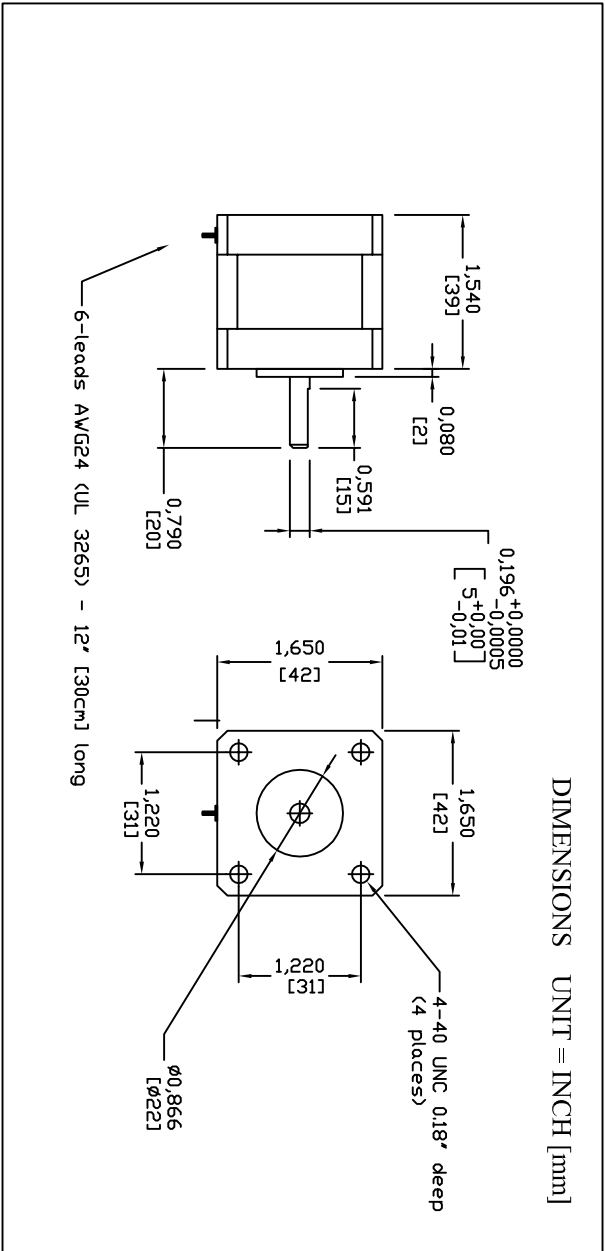

**RECOMMENDED DRIVER:** BSD-01v2 (bipolar only), BSD-01P, BSD-13G, BSD-02, BSD-02LH  
 SETUP for BSD-02 or BSD-02LH: Vref=0.9V (0.57A/phase) for (b) or 1.3V (0.8A/phase) for (u)  
 SETUP for BSD-01v2: Vref=3.1V (0.57A/phase) for (b) ONLY  
 - Available step modes: Full-, Half-, Quarter- and Eighth- (or Sixteenth-) for BSD-02LH)  
**RECOMMENDED POWER SUPPLY:** 24Vdc, min 1.2A for (b) or 24Vdc, min 1.6A for (u)

1	REV	added setup for BSD-01v2	09-10-2009
1	REV	NDTE	DATE

**InterInar ELECTRONICS**

http://www.interinar.com  
support@interinar.com

DWG M.W. SCALE not to scale

CAT 57

TITLE **2-PHASE STEP MOTOR**

DWG# **PK244-02BA-C5**

FILE NAME **PK244-02BA-C5.dwg**

SHEET 1 OF 1

DATE 09-04-2009

We have used our best effort in preparing this document. We make no representations or warranties with respect to the accuracy or completeness of the contents of this document and specifically disclaim any implied warranties of fitness for a particular purpose. We shall not be liable for any loss of profit or any other commercial damages.